



C6e Gen 2

Loadtable

Machine total mass:	2690 kg
Counterweight mass:	500 kg
Counterweight state:	Retracted
Outigger state:	Retracted
Boomlength retracted:	3,06 m
Boomlength extended:	10,26 m



Visualisation of crane configuration

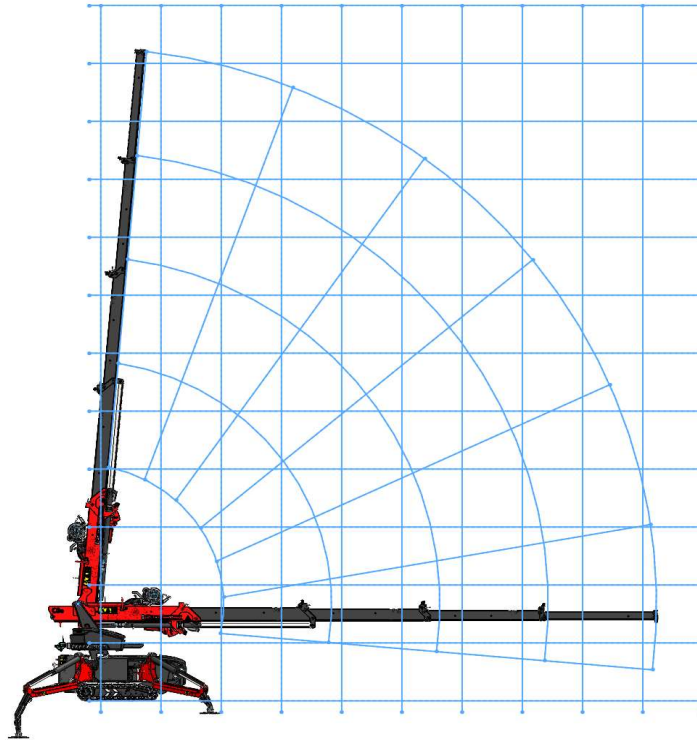

Load (kg) at given workradius and boomlength

Workradius (m)	Boomlength (m)								
	3,06	3,96	4,86	5,76	6,66	7,56	8,46	9,36	10,26
1,00	800	840	650	600	530	600	630	640	670
1,50	870	860	660	590	510	580	600	610	630
2,00	1000	910	670	590	510	570	580	580	600
2,50	1430	1010	710	600	510	560	570	570	580
Maximum capacity	2320	1070	720	610	510	560	570	570	570
3,00		1200	760	620	520	560	570	560	560
3,50		1710	850	660	530	560	560	550	540
4,00			1040	710	550	560	560	540	530
5,00				760	640	600	560	530	500
6,00					560	580	570	520	480
7,00						470	480	480	470
8,00							380	380	390
9,00									310
Maximum radius	9,85								260

Corresponding boom angle at given workradius and boomlength

Workradius (m)	Boomlength (m)								
	3,06	3,96	4,86	5,76	6,66	7,56	8,46	9,36	10,26
1,00	71	76	79	80	82	83	83	84	85
1,50	60	68	72	75	77	79	80	81	82
2,00	48	59	66	70	73	75	77	78	79
2,50	29	50	59	64	68	71	73	75	76
Maximum capacity	14	46	56	62	66	69	72	73	75
3,00		38	51	58	63	67	69	71	73
3,50		20	42	52	58	62	66	68	70
4,00			31	45	53	58	62	65	67
5,00				26	40	48	53	58	61
6,00					21	36	44	50	54
7,00						16	32	41	46
8,00							12	29	38
9,00									26
Maximum radius	9,85								8